

**KODSAN**  
HOT WATER SYSTEMS




## KA HOT WATER STORAGE TANK

Organize Sanayi Bölgesi Karamanlılar Cad. No: 10 - Sincan 06935 Ankara / TURKEY  
T. 90.312.267.07.67 - F. 90.312.267.05.54 - [www.kodsan.com.tr](http://www.kodsan.com.tr) - [info@kodsan.com.tr](mailto:info@kodsan.com.tr)



SIZE SPECIFICATIONS		KA 100	KA 160	KA 200	KA 300	KA 350	KA 400	KA 500	KA 600	KA 800	KA 1000	KA 1500	KA 2000
Total Volume	V (lt)	100	160	200	300	350	400	500	600	800	1000	1500	2000
Diameter of the Body	Ø D (mm)	490	590	590	700	750	750	750	750	900	1000	1120	1260
Total Height	H (mm)	1080	1125	1320	1210	1325	1450	1800	2040	2100	2070	2300	2230
Water inlets and outlets	N1 (inch)	1"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/2"	1 1/2"	1 1/2"	1 1/2"
Magnesium Anode	N2 (inch)	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"
Sensor	N3 (inch)	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
Electrical Heater Inlet	N4 (inch)	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	2"	2"	2"	2"
Cleaning Flange	N5 (inch)	4"	4"	4"	4"	4"	4"	4"	4"	5"	5"	5"	5"
Isolation Type	i (mm)	PU/50	PU/50	PU/50	PU/50	PU/50	PU/50	PU/50	PU/50	SU/80	SU/80	SU/80	SU/80
Net Weight	G (kg)	39	60	75	92	111	126	148	162	226	251	346	403
Gross Weight	G' (kg)	55	69	84	108	125	139	168	180	254	273	410	470
Detailed Height Size	h1 (mm)	885	890	1100	965	1070	1180	1540	1795	1745	1650	1975	1830
	h2 (mm)	630	650	650	615	670	630	1085	1330	1285	1200	1275	1380
	h3 (mm)	240	245	245	265	245	280	285	295	350	380	325	435

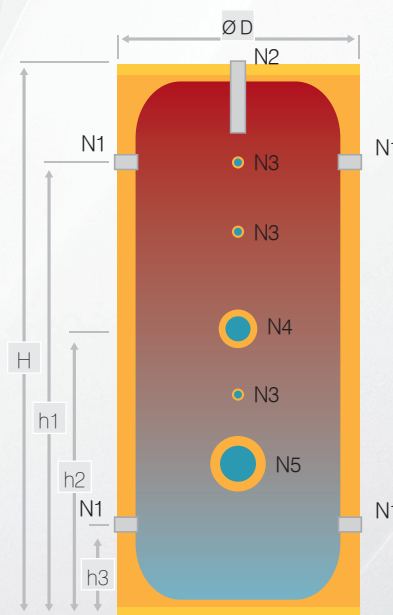

KA Series enameled hot water tanks are used for hygienically storage of hot water which does not exceed 95°C in villas, apartments, hospitals, sport facilities, industrial plants etc. with minimum heat loss. KA Series are produced as vertical and between 100lt to 2000lt.

